

PNEUMATIC VALVES | Brass Heavy Duty PE Series

PE | Air Operated

- Heavy duty brass valves, air operated
- 3/2, 5/2, 5/3
- Port size : 1/4" & 1/2" BSP & NPT

Application

- Suitable for use in aggressive environments such as mining, cement manufacturing and flour milling industries.

Technical Data

Fluid	Air / Inert gas / Water
Operation pressure	-1 to 10 bar
Ambient temperature	-5° to 55° C (option for FKM seals) up to 150° C
Lubrication	Not required (use turbine oil class ISO VG32 if lubricated)
Port size	1/4" & 1/2" BSP or NPT
Flow rate (Air)	1/4" port size = 1,100 L/min (at 5.5 bar) 1/2" port size = 3,500 L/min (at 5.5 bar)
Minimum pilot pressure	Air-Air : 2.5 bar Air-Spring : 3 bar Air-Dif : 2.5 bar Cyl-Cyl : 0.5 bar Cyl-Spring : 0.7 bar



Dif Pres for Air Assy



Air-Spring



Cyl-Dif




Cyl-Spring




Air-Air

Construction


3 port Air-Spring valve

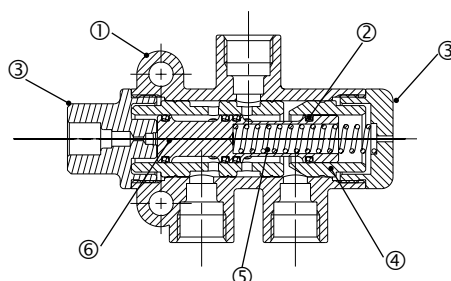

5 port Air-Air valve

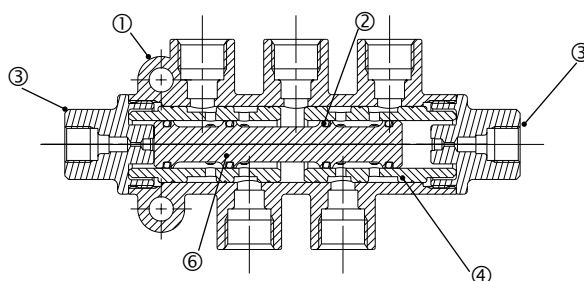

5 port, 3 Position Air-Air valve

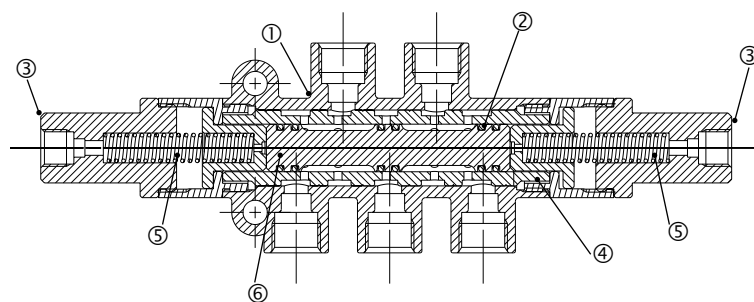

Component Parts

No.	Description	Material
1	Body	Brass *
2	"O" ring	NBR or FKM
3	End cover	Brass
4	Sleeve	Brass
5	Spring	-
6	Spool	Brass


* Painted with grey polyester

PNEUMATIC VALVES | Brass Heavy Duty


PE Series

PE | Air Operated


PEA3-S | Air-Spring | 1/4", 1/2" | 3 port



Port size : 1/4"

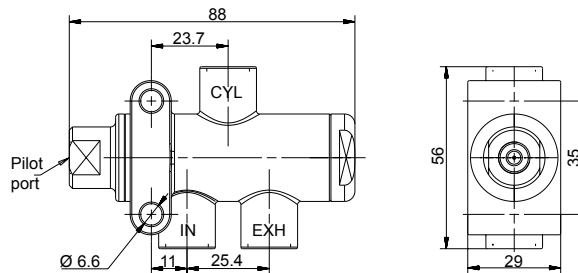

Port size : 1/2"

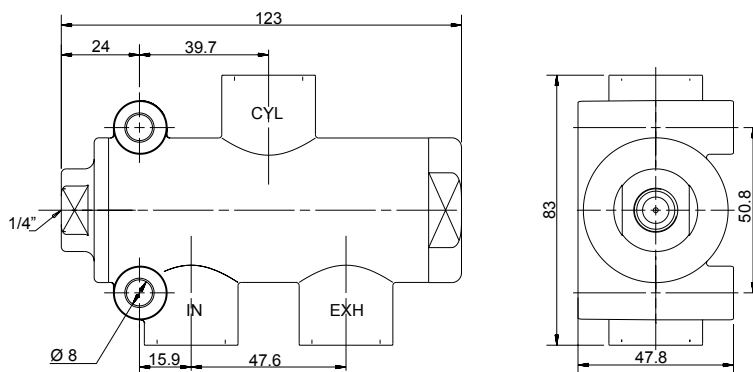


How to Order


PEA3	-	PORT SIZE	-	S	-	SEAL MATERIAL	-	PILOT PORT SIZE ⁽¹⁾	
		1/4" BSP	0			NBR	N	1/8" BSP	0
		1/4" NPT	1			FKM	V	1/4" BSP	1
		1/2" BSP	2					1/4" NPT	2
		1/2" NPT	3						

(1) Applicable for 1/4" valve only


PEA5-S | Air-Spring | 1/4", 1/2" | 5 port



Port size : 1/4"

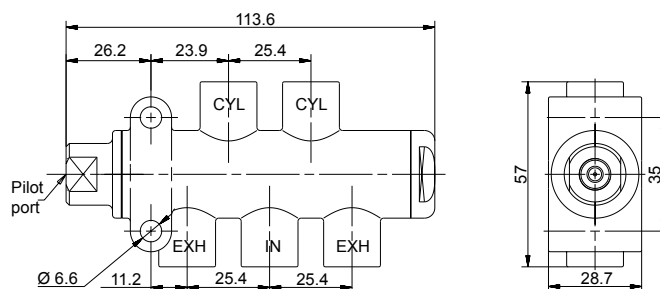

Port size : 1/2"

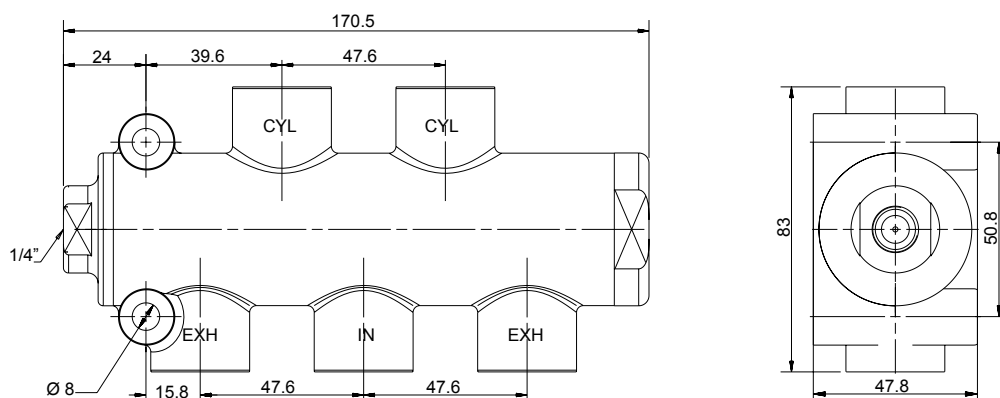

How to Order

PEA5	-	PORT SIZE	-	S	-	SEAL MATERIAL	-	PILOT PORT SIZE ⁽¹⁾
		1/4" BSP		0		NBR	N	1/8" BSP
		1/4" NPT		1		FKM	V	1/4" BSP
		1/2" BSP		2				1/4" NPT
		1/2" NPT		3				


(1) Applicable for 1/4" valve only

PNEUMATIC VALVES | Brass Heavy Duty


PE Series

PE | Air Operated


PEA3-D | Air-Air | 1/4", 1/2" | 3 port



Port size : 1/4"

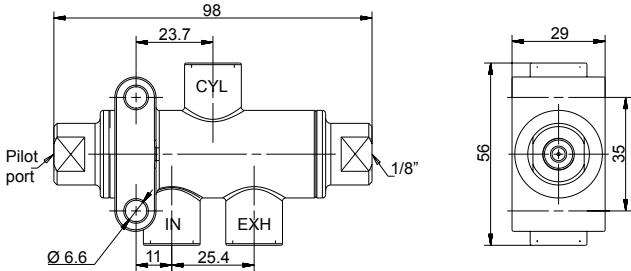

Port size : 1/2"

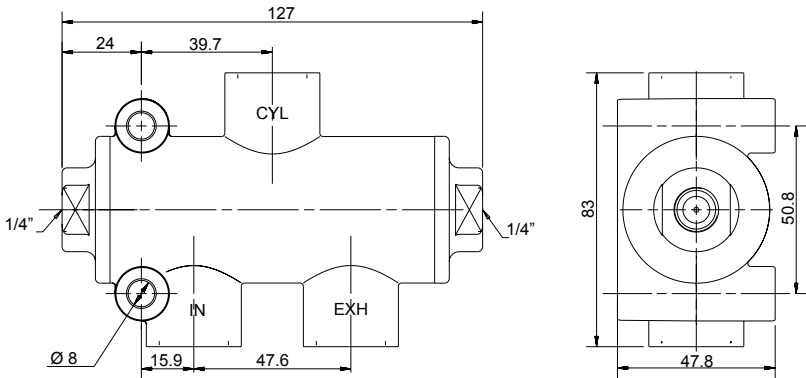


How to Order


PEA3	PORT SIZE	D	SEAL MATERIAL	PILOT PORT SIZE ⁽¹⁾
	1/4" BSP	0	NBR	1/8" BSP
	1/4" NPT	1	FKM	1/4" BSP
	1/2" BSP	2		1/4" NPT
	1/2" NPT	3		

(1) Applicable for 1/4" valve only


PEA5-D | Air-Air | 1/4", 1/2" | 5 port



Port size : 1/4"

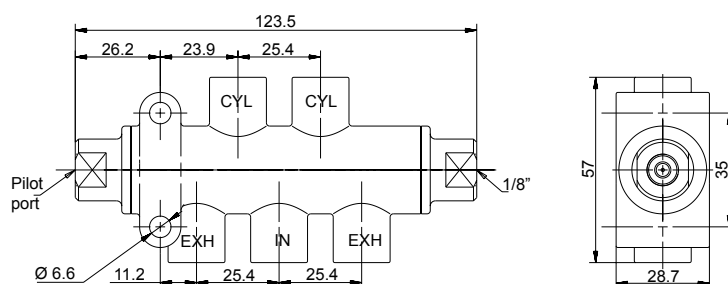

Port size : 1/2"

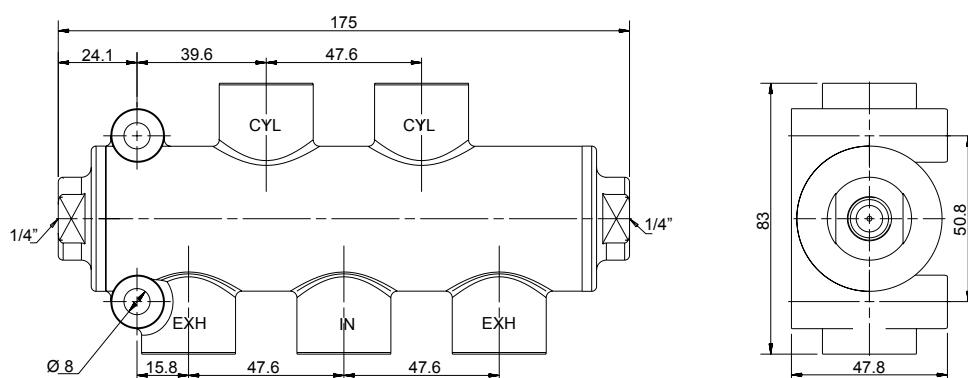

How to Order

PEA5	-	PORT SIZE	-	D	-	SEAL MATERIAL	-	PILOT PORT SIZE ⁽¹⁾
		1/4" BSP		0		NBR		1/8" BSP
		1/4" NPT		1		FKM		1/4" BSP
		1/2" BSP		2				1/4" NPT
		1/2" NPT		3				


(1) Applicable for 1/4" valve only

PNEUMATIC VALVES | Brass Heavy Duty


PE Series

PE | Air Operated

PEA-DF | Air-Differential | 1/4" | 3 & 5 port




Function : 3 port

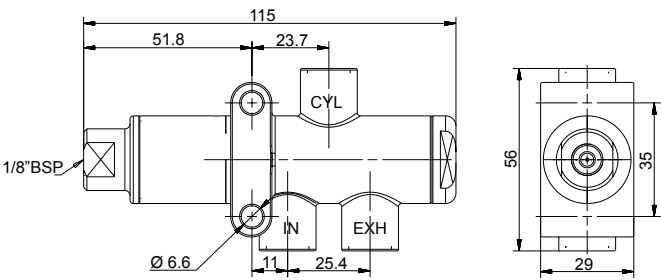

*Image is 5/2 valve


Function : 5 port

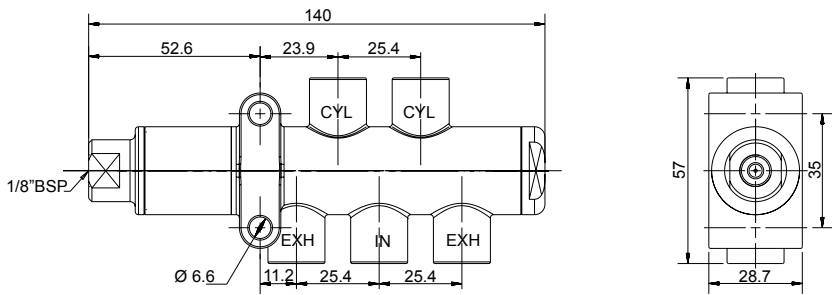


How to Order

PEA	-	PORT SIZE	-	FUNCTION	-	DF	-	SEAL MATERIAL
		1/4" BSP		0		3 port		3
						5 port		5
								NBR
								N
								FKM
								V

PEA-S | Cyl-Spring | 1/4" | 3 & 5 port




Function : 3 port

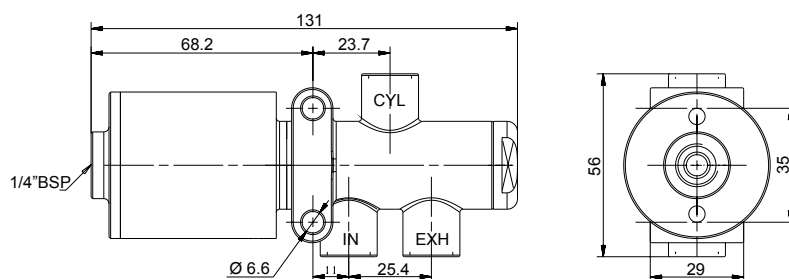

*Image is 5/2 valve

Function : 5 port

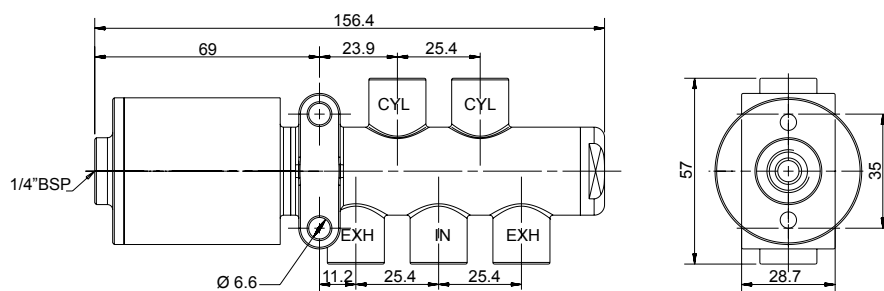

How to Order


PEA	-	PORT SIZE	-	FUNCTION	-	S	-	SEAL MATERIAL
		1/4" BSP		0		3 port		3
						5 port		5
								NBR N
								FKM V

PNEUMATIC VALVES | Brass Heavy Duty


PE Series

PE | Air Operated

PEA-DF | Cyl-Dif | 1/2" | 3 & 5 port




Function : 3 port

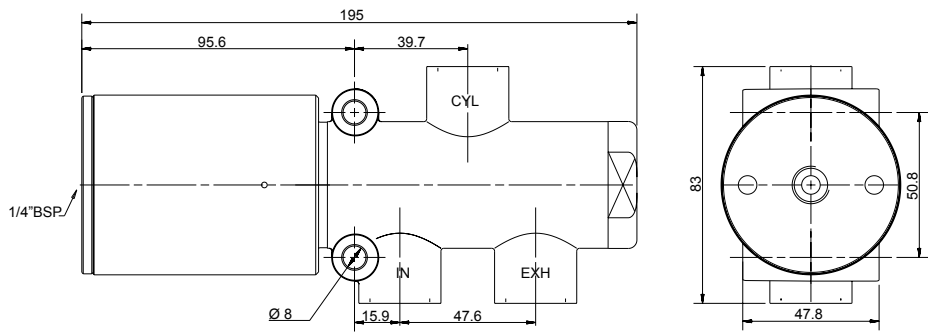

*Image is 3/2 valve



Function : 5 port

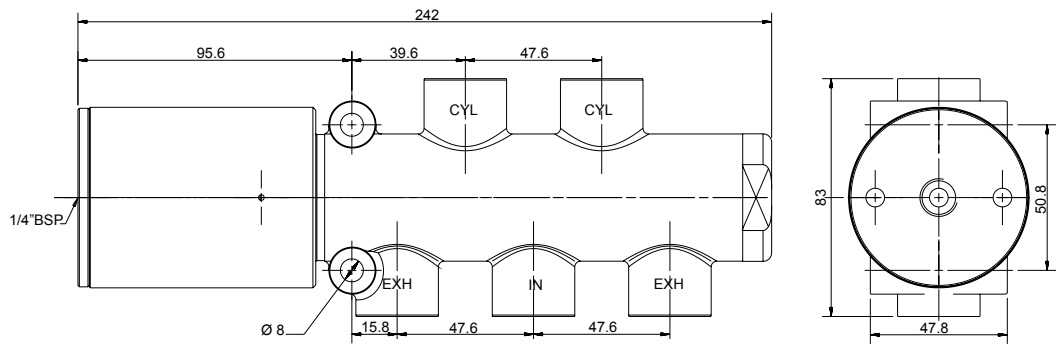



How to Order

PEA	PORT SIZE	FUNCTION	DF	SEAL MATERIAL
	1/2" BSP	2	3 port	3
			5 port	5
			NBR	N
			FKM	V

PEA5-P | 3 Position Closed Center | Air-Air | 1/4" | 5 port

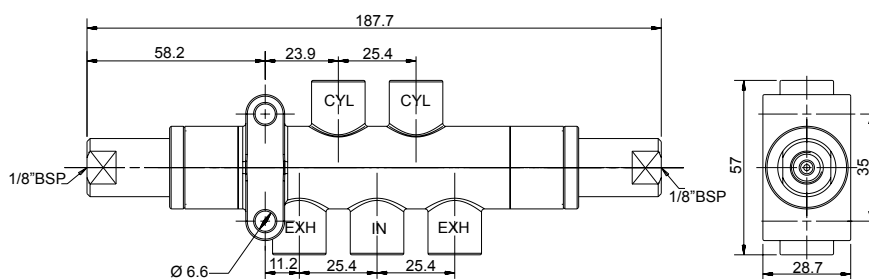

PEA5-U | 3 Position Exhaust Center | Air-Air | 1/2" | 5 port

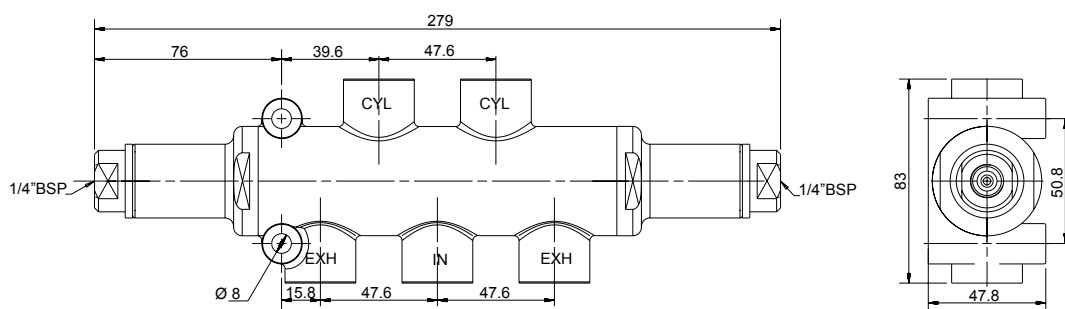


How to Order





PEA5	PORT SIZE	FUNCTION	SEAL MATERIAL
	1/4" BSP 0	Closed Center P	NBR N
	1/2" BSP 2	Exhaust Center U	FKM V

BC | Air Operated





BCA5-S | Air-Spring



BCA5-DF | Air-Differential

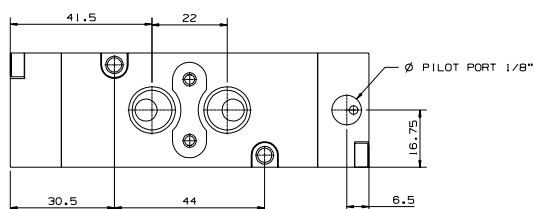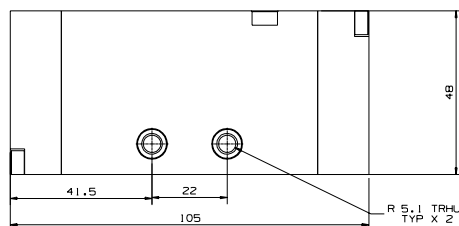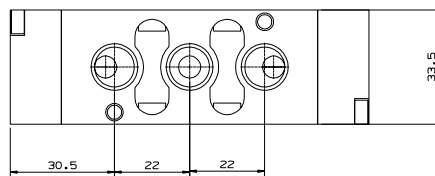

BDA5-D | Air-Air

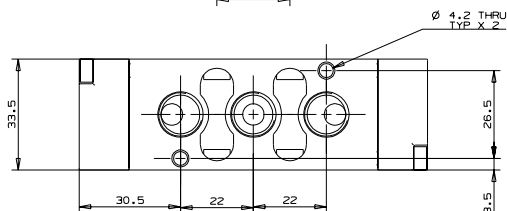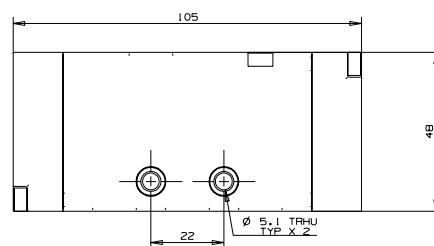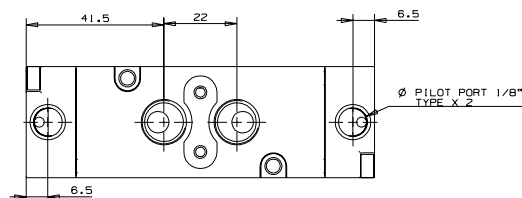

How to Order


BCA5	-	TYPE
		Air-Spring S
		Air-Dif DF
		Air-Air D

PNEUMATIC VALVES | General Purpose

BC Series | 1/4" Body Ported Valves


BC | Air Operated

BCA-N | NAMUR type Air-Spring




How to Order


BCA - **N** - S

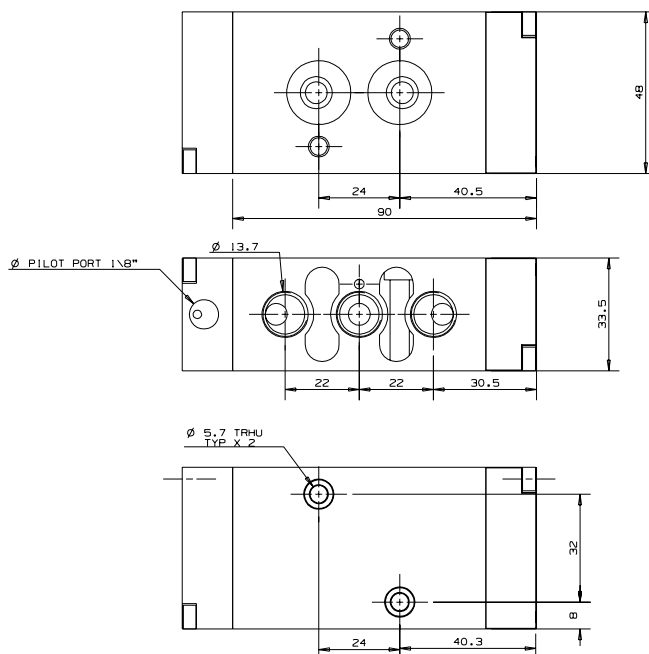



BCA5-P | 3 Position Closed Center Air-Air



BCA5-U | 3 Position Exhaust Center Air-Air



BCA5-Y | 3 Position Pressure Center Air-Air

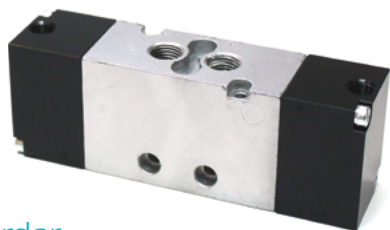

How to Order

BCA5 - FUNCTION

Closed Center	P
Exhaust Center	U
Pressure Center	Y

